

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 11336957
PUBLICATION DATE : 07-12-99


APPLICATION DATE : 28-05-98
APPLICATION NUMBER : 10146882

APPLICANT : YOKOHAMA RUBBER CO LTD:THE;

INVENTOR : TAKAHASHI SHUJI;

INT.CL. : F16L 11/08 B29D 23/00 B60C 9/00
C08G 67/02 D02G 3/48 F16G 1/08 //
D01F 6/76

TITLE : FIBER REINFORCED MOLDING

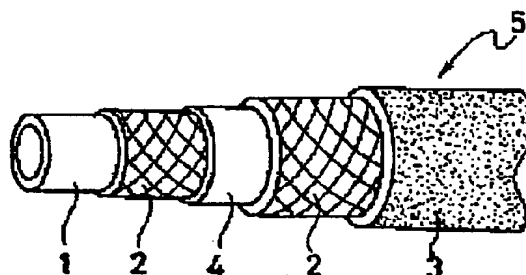

ABSTRACT : PROBLEM TO BE SOLVED: To provide a fiber reinforced molding having an excellent characteristic as the fiber reinforced molding by effectively utilizing light aliphatic polyketone fibers.

SOLUTION: In the case of a hose, a fiber cord formed with a reinforced layer 2 has a structure as shown in formula 1, the hose is formed by a cord including at least aliphatic polyketone fibers where a relation of (n) with (m) is $1.05 \geq (n+m)/n \geq 1.00$, and strength of the fiber cord is 10 g/d or more. In the case of a belt, a fiber cord arranged in a belt lengthwise direction of a reinforced layer 11 has a structure as shown in a formula, the belt is formed by a cord including at least aliphatic polyketone fibers where a relation of (n) with (m) is $1.05 \geq (n+m)/n \geq 1.00$, strength of the fiber cord is 10 g/d or more, and elongation percentage at 2.25 g/d is 3.0% or less. Formula 1 is represented by $-(CH_2CH_2-CO)_n-(R-CO)_m-$, where R is a 3C or higher alkylene group.

COPYRIGHT: (C)1999,JPO